




PJ920 ultra-short throw projector for ēno™

by Polyvision

Pj920 specifications

- DLP with Brilliant Color technology
- Native resolution: WXGA (1280 x 800)
- Aspect ratio: 16:10 Native, 16:9, 4:3
- Brightness: 2500 Lumens (typical); 2200 Lumens (eco mode)
- Lamp life: 4000/6000 hrs.
- 6-segment color wheel (RGBCWY)
- Contrast ratio: 1500:1
- Throw Ratio: 0.192
- Keystone correction: $\pm 15^\circ$
- 10 watt built-in speaker
- 3D-ready
- I/O connections: VGA (x2), HDMI, S-Video, Composite Video RCA, Audio mini jack (in and out loop), VGA Monitor Out
- Control terminals: LAN Ethernet RJ45, USB, Serial RS-232
- Networks: IP for remote management
- Compatibility for video system: NTSC/NTSC 4.43, PAL-B/G/H/I, SECAM
- Compatibility for video interface: Composite, S-Video, Component YPbPr, Component YCbCr, VESA Standard
- Format compatibility: QVGA, VGA, SVGA, XGA, SXGA+, UXGA
- Acoustic noise: 29dB (typical 230 W); 27 dB (typical eco mode 190 W)
- Weight: <20 lbs. (<9 kg)
- Lamp replacement accessible when mounted
- Warranty: 1 years on projector; 6 months on lamp
- Kensington theft protection
- Power cord: 4.5m
- VGA cable: 4.5m
- USB cable: 4.5m
- Power requirements: 100V-240V, 50 / 60 Hz
- Power consumption : 290 W (normal use); 240 W (eco mode); <1 W (standby)
- Temperature: 5°C ~ 40°C; -10°C ~ 60°C (non-operating)
- Operating altitude: sea level to 10,000' at 23°C
- Humidity: 10% - 85% (no condensation); 5% - 95% (no condensation, non-operating)

ēno one fixed wall arm configuration

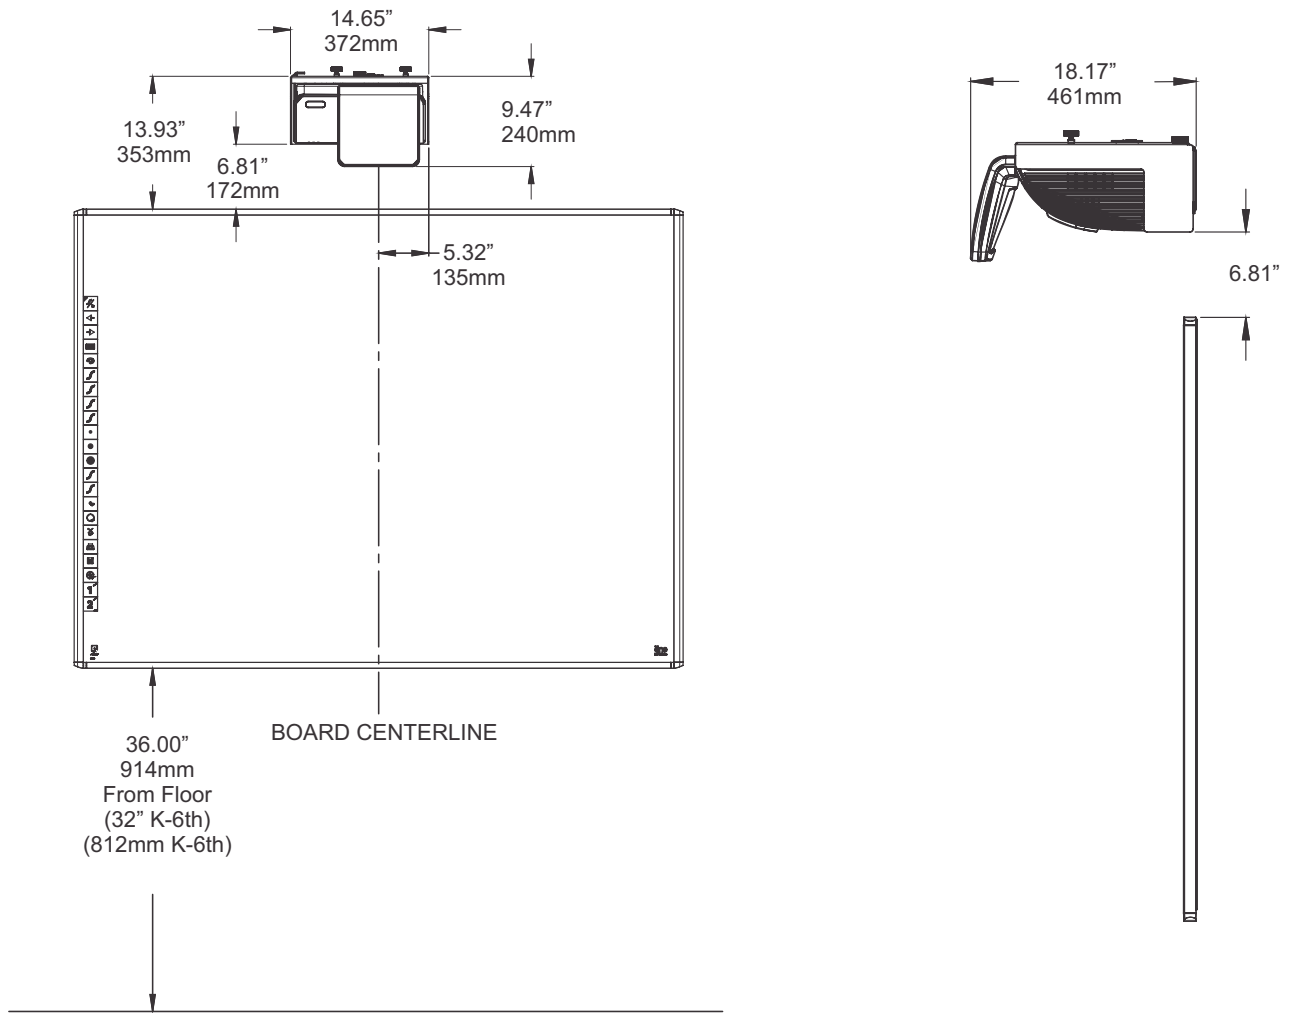

SKU	Interactive whiteboard	Projector	Mount
ēno one 2610 FWA UST	ēno classic 2610	PJ920	Fixed wall arm
ēno one 2810 FWA UST	ēno classic 2810	PJ920	Fixed wall arm

*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use.

©2012 Whitemark Limited. All rights reserved. Trademarks used herein are the property of Whitemark Limited or of their respective owners. We reserve the right to make changes in product design, construction or detail, and to discontinue any product or material without notice.

Whitemark[®] Limited

REGD. OFFICE

M-1, Chiranjiv Tower, 43 Nehru Place,
New Delhi - 110019.
Phones : (011) 26479314 / 26233990
Fax : (011) 26217129
E-mail : info@whitemark.in
Website : www.whitemark.in

GURGAON OFFICE

12, Amaltas Marg,
DLF City, Phase-I, Gurgaon-122002.
Phone : (0124) 4052708
Telefax : (0124) 4052709
E-mail : gurgaon@whitemark.in

BANGALORE OFFICE

78, New Timber Yard Layout,
Mysore Road, Bangalore - 560026.
Phone : (080) 65969551
Telefax : (080) 26744754
E-mail : bangalore@whitemark.in